

THE DATASHEET OF CR2330

CR2330

LITHIUM MANGANESE DIOXIDE



Features & Benefits

- Good pulse capability
- High discharge characteristics
- Stable voltage level during discharge
- Long-term reliability

Specifications


Nominal Capacity: 265 mAh

Nominal Voltage: 3V


Weight: 3.8g

Operating Temperature: -30°C - +60°C


Dimensions




Temperature Characteristics

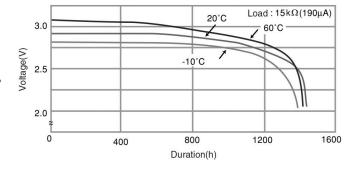

Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)



Capacity vs. Load Resistance



AWARNING

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 498 8666 for US and Canada.

International: 303-389-1300

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.

LithiumManganeseDioxide/CR2330/Copyrightfd2018 Panasonic Corporation of America. All Rights Reserved.

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit **www.na.industrial.panasonic.com/products/batteries** or e-mail **oembatteries@us.panasonic.com**.

The data in this document is for descriptive purposes only and is not intended to make or imply any quarantee or warranty.