



THE DATASHEET OF 110TR




SURFACE MOUNT (SMT) COIN CELL ENCLOSURE CONTACTS






- Contacts for Enclosure cases with self contained battery compartments
- Design facilitates easy battery access, removal & installation
- Suitable for industrial and consumer product applications
- Spring contacts adjust to variations in battery diameter for a dependable connection
- Positive and Negative contacts can be used as a design pair or individually on a PCB
- Accommodates cell diameters from 16mm to 30mm

MATERIAL: .006 (.15) Stainless steel, Gold plate (flash)

AVAILABLE ON TAPE AND REEL

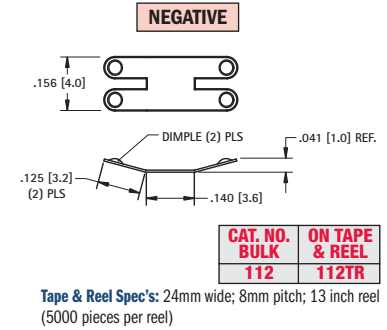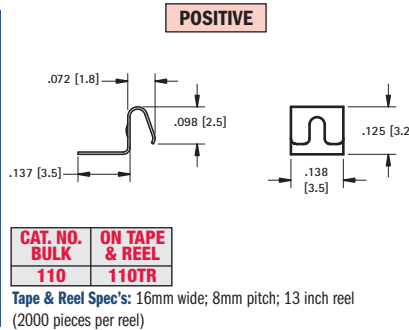
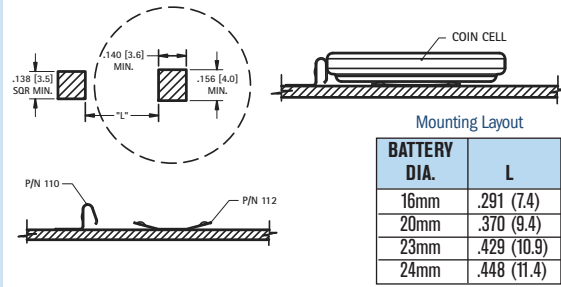


THRU-HOLE (THM) & SURFACE MOUNT (SMT) NEGATIVE BATTERY CONTACTS

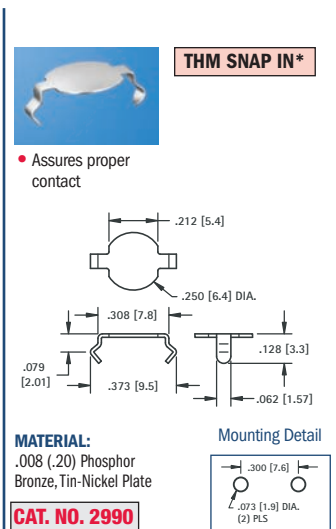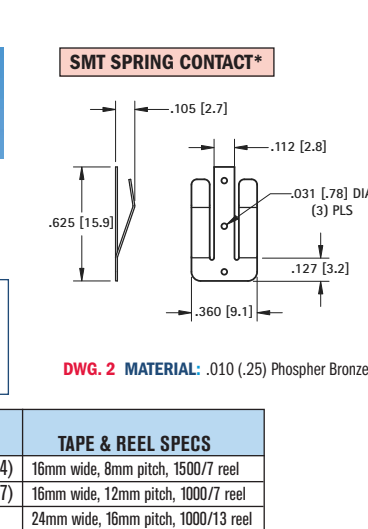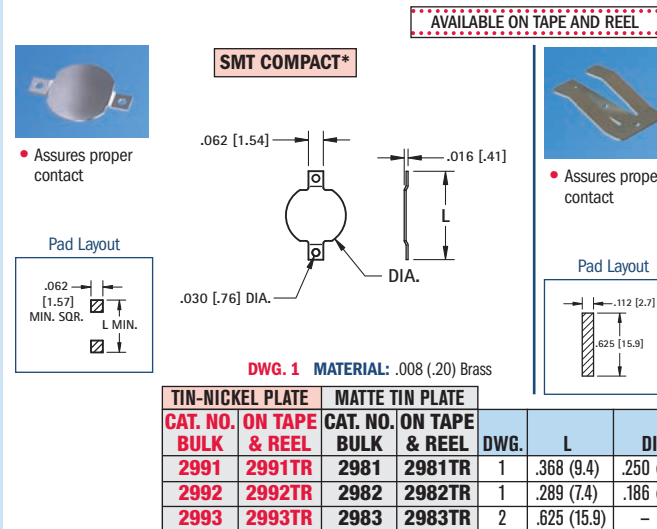

*Note: Cannot be used with Cat. No. 3028, 3029, 3032, 3038, 3042, 3026, 3078.

THRU-HOLE (THM) & SURFACE MOUNT (SMT) INSULATED RETAINERS

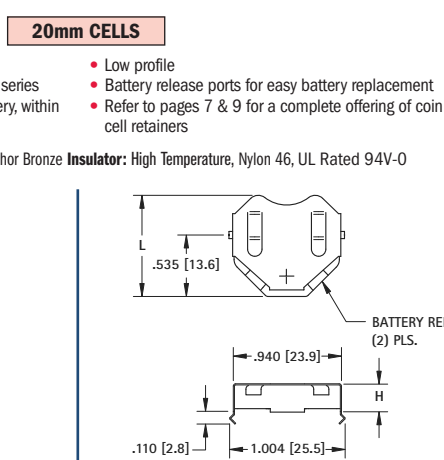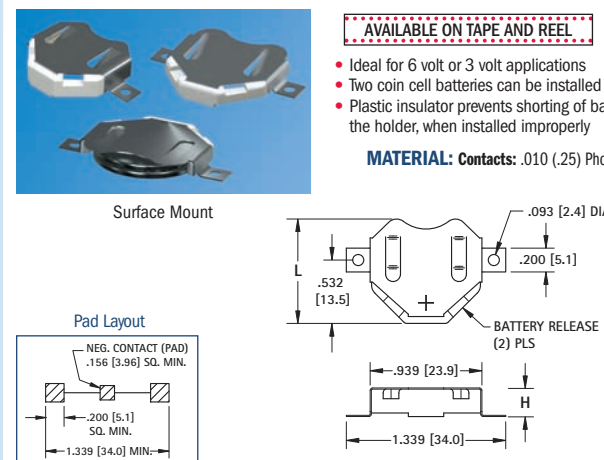

Surface Mount			Thru Hole Mount		
Tin-Nickel Plate	Matte Tin Plate		Tin-Nickel Plate	Matte Tin Plate	
CAT. NO. LOOSE*	CAT. NO. BULK	ON TAPE & REEL	CAT. NO. LOOSE*	CAT. NO. BULK	ON TAPE & REEL
3020-2	3020	3020TR	3070-2	3070	3070TR
3022-2	3022	3022TR	3072-2	3072	3072TR
3024-2	3024	3024TR	3074-2	3074	3074TR

BATTERY REFERENCE				BATTERY REFERENCE			
6 VOLT (2) CELLS	3 VOLT (1) CELL	L	H	6 VOLT (2) CELLS	3 VOLT (1) CELL	L	H
2012, 2016	2020, 2025	.890 (22.6)	.156 (4.0)	2012, 2016	2020, 2025	.890 (22.6)	.156 (4.0)
2020, 2025	2032	.877 (22.3)	.240 (6.1)	2020, 2025	2032	.877 (22.3)	.240 (6.1)
2032	Not Applicable	.877 (22.3)	.295 (7.5)	2032	Not Applicable	.877 (22.3)	.295 (7.5)

* Supplied Unassembled
Tape & Reel Spec's: 56mm wide; 28mm pitch; 13 inch reel: 3020TR, 3070TR 400 pieces per reel; 3022TR, 3072TR 250 pieces per reel; 3024TR, 3074TR 250 pieces per reel