


THE DATASHEET OF AP-120

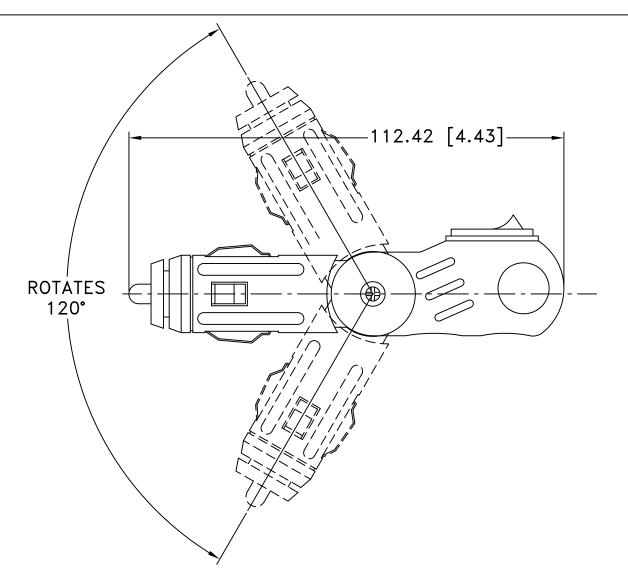

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/15/03		ADDED SWITCH SPECIFICATION REVISED TITLE	T.B.	B.S.	
11/07/14	В	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
·					

SPECIFICATION:

BODY: HIGH IMPACT ABS, UL94V-0, FILE NO. E56070(S)

COLOR: BLACK

CENTER CONTACT: BRASS, NICKEL PLATED

SLIDING CONTACTS: PHOS. BRONZE, NICKEL PLATED

SPRING: SW70C, ZINC PLATED

FUSE: 250V, 5 AMP, 3AG 6.35mm x 30mm (1/4" X 1 1/4")

RATED AT 18 HOURS, CONTINUOUS DUTY 10 AMP'S MAX WITH CORRECT FUSE. SWITCH: RED LED, 10 AMPS - 125 VOLTS

OR 5 AMPS - 250 VOLTS

ROHS 2 COMPLIANT

Tolerance	■ MPD Mem	nory Protection Devices, Inc					
(Except as noted)		200 Broad Hollow Road, Farmingdale, New York 11735					
decimal			Scale	Drawn By B.S.			
±.5 (.020)				Approved By T.B.			
Fractional	Title LIGHTED ROTARY CIGARETTE PLUG WITH						
± .8 (.030)	10AMP SWITCH AND 5AMP FUSE						
Angular	Date	Drawing Number					
± 3°	11/07/14	AP120					