




THE DATASHEET OF
009162006401070

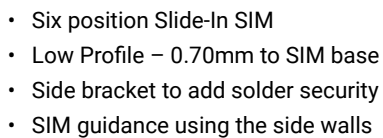

- Cellular Phones
- Radios

- SMT Slide-In SIM
- Molded in high temperature LCP
- 0.38μm Gold on contact surface and gold flash on contact tails
- 1.60mm connector height
- Tape & Reel packaging

- Current Rating: 0.3 Amp / Contact
- Voltage Rating: 15 VAC

- Operating Temperature: -55°C to +70°C

- Insulator Material: High Temperature Plastic; UL94 V-0
- Contact Material: Copper Alloy
- Plating: Gold over Nickel
- Durability: 10,000 Cycles

| Prefix | Series | Number of Contacts | SIM Type |
|--------|--------|--------------------|----------|
| 00 | 9162 | 006 | 40 |

40 = SMT Slide-in SIM


1
Contact Plating
1 = 0.38µm Gold on Contact Surface
and Gold Flash on Solder Tails.
Underplated 1.27µm Nickel.

070
T
SIM Height
070 = 0.70mm on SIM Card
1.60mm on Connector

SIM CARD CONNECTORS

Slide-In Low Profile SIM 9162-400


CONNECTOR DETAILS

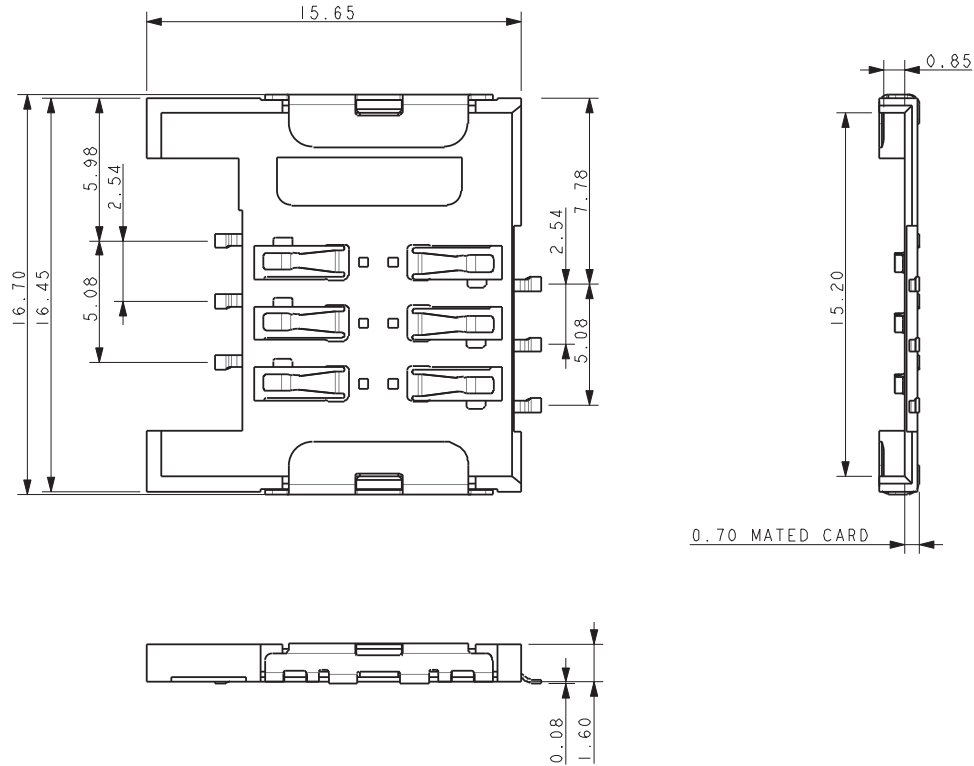

NOTES:

1. DIMENSIONS SHOWN ARE REFERENCED DIMENSIONS.
2. INSULATOR MATERIAL: LCP, UL94 V-0, COLOR BLACK.
3. CONTACT MATERIAL: PHOSPHOR BONZE.
4. CONTACT PLATING: NICKEL ALL OVER, GOLD ON CONTACT, GOLD FLASH ON TAILS.
5. PADS: NICKEL PLATED STAINLESS STEEL, PURE TIN PLATING.
6. COPLANARITY OF PADS 0.10 MAXIMUM.
7. FOR FULL PRODUCT SPECIFICATION REFER TO ELCO SPEC 201-01-112.



SUGGESTED PCB LAYOUT

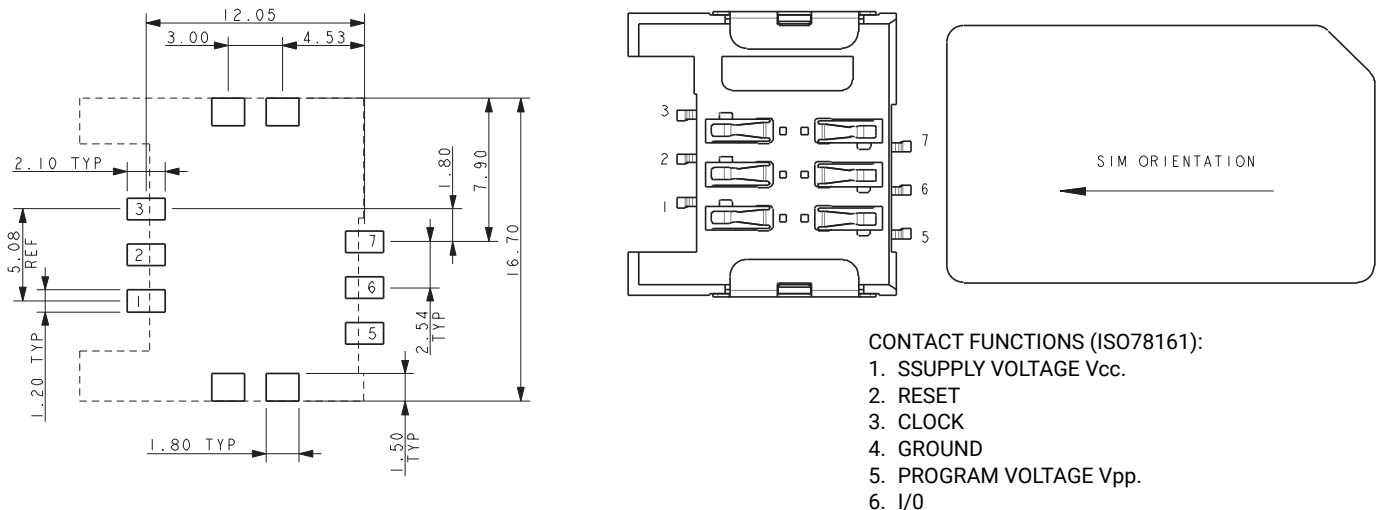

SIM CARD CONNECTORS

Slide-In Low Profile SIM 9162-400

PACKING DETAILS

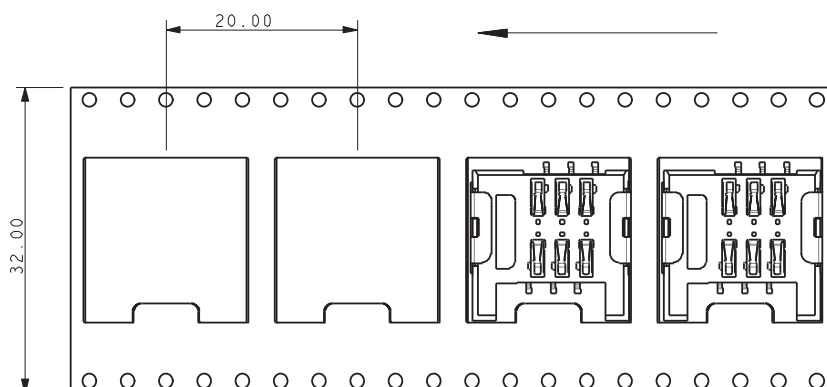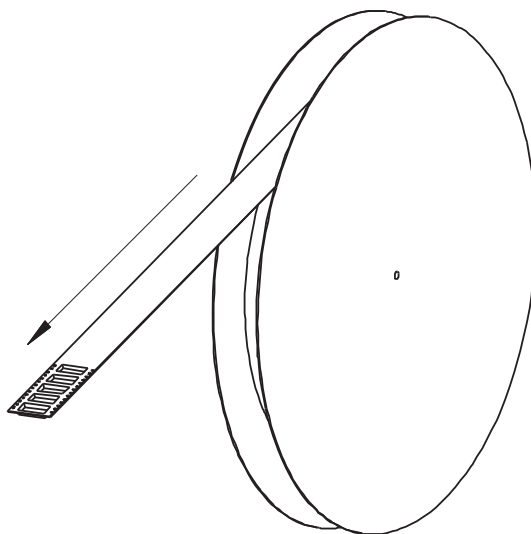

NOTES:

1. TO BE PACKED IN TAPE AND REEL.
2. 1000 PIECES ON A 330MM REEL.
3. COMPONENT DIRECTION AS SHOWN.